




## Building Installation Connector System AC 166®

G

Plug and Socket Connectors Tall Version

### AC 166-1/ 3 ZEL R WS

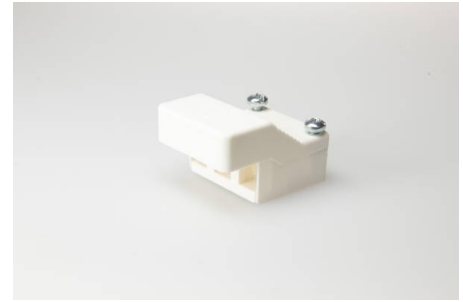

#### Order Info

reference number (ref. no.)	166053
PU	200
EAN	4028012100767

#### Type

Type	strain relief
number of poles	3 pole
colour	white
strain relief	yes
type of strain relief	circular clamp, without latch

#### Connection Data

sheathing cable diameter	6.5 - 8.3 mm
dismantling length	32.0 mm
dismantling length PE	39.0 mm
strain relief assembly	PZ 1 / ⤵ 0.5 Nm

#### Ambient Conditions

T <sub>max</sub> ambient air (at rated current)	100 °C
---	--------

#### Materials

insulator material	PA
flammability rating acc. to UL 94	V-2